

H2 Series

Horizontal Advertising Player Machine



FMT H2 Series
Monitor size from
15.6 - 65 inch

Capacitive/Infrared
Touch screen
Available

Industrial Grade
Monitor Stand

FMT H2 Series

All-in-one professional display device that integrates query, interaction and information release.

The appearance, internal structure and functional design are all built for commercial use. It has a variety of appearance structures and can be customized.

It is widely used in public information inquiries in various industries.



Highlight

- Using high-quality capacitive touch panel, ultra-high light transmittance, strong anti-riot ability, scratch-resistant and wear-resistant, dust-proof and water-proof.
- High touch sensitivity, fast speed, no drift phenomenon.
- Professional chip and processing technology to ensure high picture quality.
- Industrial-grade high-performance LCD screen to ensure high-definition, high-brightness and stability of images.
- The shell is designed with high-strength steel, the appearance is ultra-thin, beautiful and strong, with excellent protection level and electromagnetic shielding performance.
- The surface has fine grained paint, smooth and uniform, simple and generous, the color is integrated with the industrial host, and has a good anti-rust and wear-resistant function.
- Multiple signal interfaces, support multiple signal input/output.
- High reliability, high stability, suitable for education and training, exhibitions, public media, video conferences, military command, traffic management
- Using industrial industrial control motherboards, Intel high-end dual-core processors, high-speed hard drives.



Configuration

Standard Configuration

- Android 7.1 RK3288
- Cortex-A17 quad-core CPU Mali-T764 1.8 Ghz
- 2GB RAM / 16GB ROM EMMC Storage

Configuration option-1

- Android 9.0 RK3399
- Quad-core 64-bit high-performance CPU 2.0Ghz
- 2GB RAM / 16GB ROM EMMC Storage

CPU Option

- Dual-core Cortex-A72,
- Quad-core Cortex A-53 64-bit
- Quad-core arm Mali-T860MP4 High-performance CPU

Other Option

- Capacitive / Infrared 10-points touch screen
- Ram 4 GB, Rom 32/64 GB
- Built-in low power consumption MCU Cortex-M0
- Wireless WiFi (Mini-PCIe 4G optional)

Color Available



Black

White

Silver

Color can be customize specification and function, etc. Welcome to consult.

Digital Signage H2 Series
Horizontal Advertising Player Machine


FMT Corporation Co.,Ltd.

Leading Business Automatic Machine
49/293 Soi Vibhavadi-Rangsit 64 Yeak 13,
Talat Bangkheng, Lak Si,
Bangkok 10210
02-5217155-59
086-6889050
fmt_sales@hotmail.com



H2 Series

Horizontal Advertising Player Machine

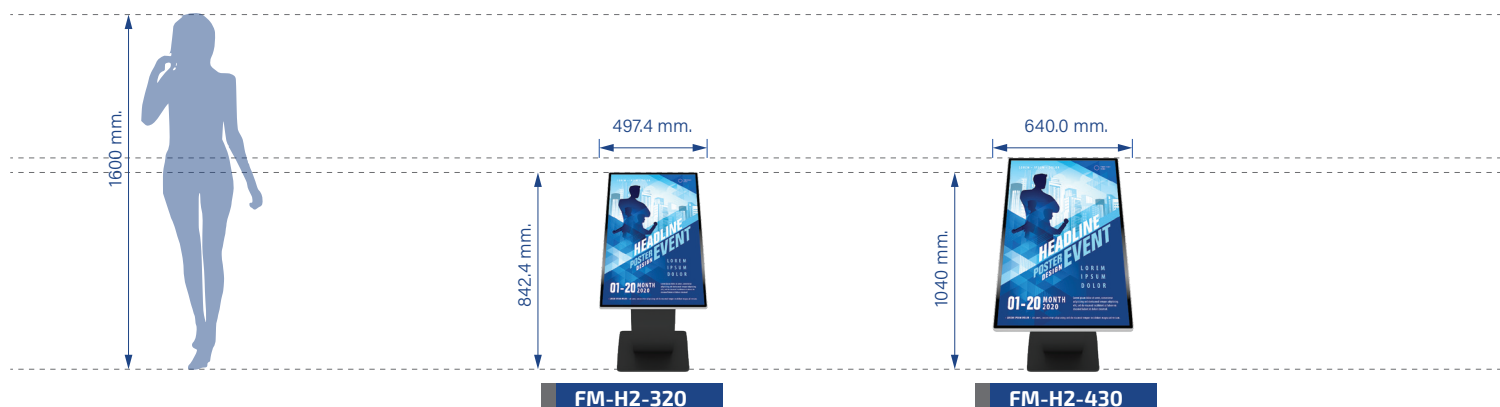

	FM-H2-320	FM-H2-430
Model :	32 inch	43 inch
Machine size :	842.4 x 497.4 x 73.2 mm.	1040 x 640 x 50.2 mm.
Visual size:	695.69 x 390.26 mm.	930.25 x 523.01 mm.
Monitor size :	850 x 150 x 570 mm.	1130 x 180 x 720 mm.
Stand size :	460 x 420 x 1010 mm.	540 x 510 x 1010 mm.
Weight :	45 Kg.	60 Kg.
LED Parameter		
LED Brand :	32 inch (AUO/BOE)	43 inch (LG/BOE)
Display ratio :	16 : 9	16 : 9
Resolution :	1366 x 768	1920 x 1080
Pixel pitch :	0.51075 x 0.17025 mm	0.1815 0.5415 mm
Horizontal frequency :	30-80 KHz.	30-80 KHz.
Vertical frequency :	60 / 75 Hz.	60 / 75 Hz.
Color support :	16.77 million	16.77 million
LED Life :	50,000 Hrs.	50,000 Hrs.
Average brightness :	350 cd/m ²	350 cd/m ²
Contrast :	1200 : 1	1200 : 1
Viewing angle :	Up/Down/Left/Right 178°	Up/Down/Left/Right 178°
Input voltage :	110-220 VAC (50-60 Hz)	110-220 VAC (50-60 Hz)
Power management :	Compliant with VESA DPMS	Compliant with VESA DPMS
Power consumption :	≤ 80W	≤ 110W
Working temperature :	0 - 40 °C	0 - 40 °C
Storage temperature :	-10 - 50 °C	-10 - 50 °C

Introduction to network version features

- Perfect support for 1080P full HD decoding, compatible to drive 15-100 inch LCD screen.
- Support mainstream media formats, support split-screen playback functions such as pictures, videos, rolling subtitles, and office software.
- Support display of station logo, date, time, week, weather forecast, etc.
- Diverse and flexible interface layout, split screen and full screen freely.
- Any switch between horizontal and vertical screens, smooth transition without black screen.
- Support picture + background music playback mode, which can replace traditional light boxes and posters.
- Support multiple playback modes such as loop, timing, interstitial, pad, etc., to achieve flexible control of playback time, sequence, frequency, content, location, etc.
- Multi-screen interaction, realizing multiple display terminals to play the same content at the same time.
- Support resumable downloading and downloading regularly, and reasonably occupy network bandwidth.
- Super multi-period timing switch function, unattended.
- Support U disk import or direct playback.
- Automatic repair, remote upgrade, intelligent domain name resolution, convenient and quick operation and maintenance
- Support LAN/WiFi/3G/4G network access, which can realize multi-network hybrid networking.

Application

- Sales hall, real estate agency (house type and landscape effect display)
- Car for sale shop (car model display)
- Furniture and art store (product display)
- Cinema (movie trailer and clip appreciation)
- Office building and apartment lobby (advertising)
- Banks and other financial institutions, business inquiries, service promotion
- Telecommunications
- Government agencies (public information release, government affairs disclosure)
- Shopping center (shopping guide, merchant and product inquiry, advertising promotion)
- Fashion flagship store, specialty store (new product introduction)
- Company reception room or meeting room (company introduction, exhibit display)
- Exhibition hall and venue design company (event venue layout)

H2 Series

Horizontal Advertising Player Machine



Capacitive Touch Screen Parameter	
Induction Technology :	Multi-point projected capacitive touch
Application solution :	Heria
Touch point :	10 point touch
Sensing objectt :	Finger , Capacitive touch pen
Transmittance :	Viewing area > 85%
Touch accuracy :	10 ± 1 ms
Resolution :	4096 x 4096
Response time :	Sungle point or Multi-point < 4 ms
Cursor speed :	Up to 120 point/sec
Service life :	More than 60,000,000 clicks
Screen protection glass :	3mm or 4mm optical tempered glass
Touch screen power supply :	USB or Serial port DC power supply (4.5-5V)
Power consumption :	< 1W
Compatible system :	Windows 7 / 10 , Android , Linux
Position correction :	Modify firmware through HERIA APK tool
Anti-glare decay function :	Capacitive touch not degraded by light
Operating temperature :	-10 °C - 60 °C
Infrared Touch Screen Parameter	
Induction Technology :	Infrared sensor for tube, Tube > 300 pairs
Touch point :	Infrared 10-point touch screen without driver
Sensing objectt :	Any opaque objects
Touch accuracy :	< 1.5 mm (Central Area) , < 2.0 mm (Edge Area)
Resolution :	32,767 x 32,767
Response time :	Single point mode : First point (click) : 8 ms / Continuous (writing) : 3 ms Multi-Point modes : First point (click) : 8 ms / Continuous (writing) : 8 ms Mouse Mode : First point (click) : 8 ms / Continuous (writing) : 8 ms
Cursor speed :	Sungle point up to 300 points/sec , Multi-Point and Mouse up to 125 points/sec
Service life :	More than 60,000,000 clicks
Screen protection glass :	3mm optical tempered glass
Touch screen power supply :	DC power supply (4.5-5V)
Power consumption :	< 1W
Compatible system :	Windows 7 / 8 to archieve 2-point operation and writing, Support WIN 7 gesture reconition
Position correction :	Comply with HID equipment standard. No positioning is required, and a management program is provided for positioning correction. 4 or 5 Point positioning methods can be select.
Anti-glare decay function :	Capacitive touch not degraded by light

TV Parameters (optional)	
TV system :	NTSC M/N , PAL BG/DK/I/H , SECAM L/L
Resolution :	Analog and digital support upto 1080P format
Input interface :	TV , VGA , HDMI , YPBPR , USB , AV , S-VIDEO
Output interface :	AV
Voice control :	Automatic sound standard detection, support balance adjustment, surround
Sound power :	2 x 10 W
Input/output ports (optional)	
USB Interface :	2 x USB 2.0
TF Card :	Standard 1 channel, multiple channels can be customize
HDMI Interface :	1
DC :	1
MIC audio input :	1
LINE audio output interface :	1
LAN network interface :	1 x RJ45
Power	
Voltage :	DC 12V / AC 100-240V 50-60 Hz (External)
Standby power (Energy Star) :	1W
Configuration option	
Standard configuration :	J1900 industrial control motherboard , CPU Celeron quad-core 1.8 GHz , Memory and harddisk optional
Hi-end configuration :	H81 / B75 industrial control motherboard , CPU G2030/i3/i5/i7 , Memory and harddisk optional
Power supply :	Megmeet integrated power supply
Wireless keyboard and mouse :	Optional
Strage humidity :	5% - 95%



KEY



Wi-Fi Antenna




Power cable



Hex Wrench



Warranty Card



QC Sticker

Digital Signage H2 Series
Horizontal Advertising Player Machine

FMT Corporation Co.,Ltd.

Leading Business Automatic Machine
49/293 Soi Vibhavadi-Rangsit 64 Yeak 13,
Talat Bangkhen, Lak Si,
Bangkok 10210
02-5217155-59
086-6889050
fmt_sales@hotmail.com

