

# S2 Series

Standing Advertising Player Machine



## FMT S2 Series

The touch query all-in-one is a professional display device that integrates query, interaction, and information release. The appearance, internal structure and functional design are all built for commercial use. It has a variety of appearance structures and can be customized. It is widely used in public information inquiries in various industries.

## Highlight

- Using high-quality capacitive touch panel, ultra-high light transmittance, strong anti-riot ability, scratch-resistant and wear-resistant, dust-proof and waterproof
- High touch sensitivity, fast speed, no drift phenomenon
- Professional chip and processing technology to ensure high picture quality;
- Professional chip and processing technology with high picture quality
- Industrial-grade high-performance LCD screen to ensure high-definition, high-brightness and stability of images
- Shell is designed with high-strength steel
  - Appearance is ultra-thin, beautiful and strong, with excellent protection level and electromagnetic shielding performance
  - Surface has fine grained paint, smooth and uniform, simple and generous
  - Machine color is integrated with the industrial host, and has a good anti-rust and wear-resistant
  - Multiple signal interfaces, support multiple signal input/output
  - High reliability, high stability, suitable for education and training, exhibitions, public media, video conferences, military command, traffic management
  - Industrial grade motherboards



## Configuration

### Standard Configuration

- Android 7.1 RK3288
- Cortex-A17 quad-core CPU Mali-T764 1.8 Ghz
- 2GB RAM / 16GB ROM EMMC Storage

### Configuration option-1

- Android 9.0 RK3399
- Quad-core 64-bit high-performance CPU 2.0Ghz
- 2GB RAM / 16GB ROM EMMC Storage

### CPU Option

- Dual-core Cortex-A72,
- Quad-core Cortex A-53 64-bit
- Quad-core arm Mali-T860MP4 High-performance CPU

### Other Option

- Ram 4 GB, Rom 32/64 GB
- Built-in low power consumption MCU Cortex-M0
- Wireless WiFi (Mini-PCIe 4G optional)

### Color Available



Black



White



Silver

Color and specification can be customized. Welcome to consult.



**Digital Signage S2 Series**  
Standing Advertising Player Machine

**FMT Corporation Co., Ltd.**

Leading Business Automatic Machine  
49/293 Soi Vibhavadi-Rangsit 64 Yeak 13,  
Talat Bangkhen, Lak Si,  
Bangkok 10210  
02-5217155-59  
086-6889050  
fmt\_sales@hotmail.com



# S2 Series

Standing Advertising Player Machine




## Application

- Sales hall, real estate agency (house type and landscape effect display)
- Car for sale shop (car model display)
- Furniture and art store (product display)
- Cinema (movie trailer and clip appreciation)
- Office building and apartment lobby (advertising)
- Banks and other financial institutions
  - business inquiries
  - service promotion
- Telecommunications
- Government agencies (public information release, government affairs disclosure)
- Shopping center (shopping guide, merchant and product inquiry, advertising promotion)
- Fashion flagship store, specialty store (new product introduction)
- Company reception room or meeting room (company introduction, exhibit display)
- Exhibition hall and venue design company (event venue layout)

## Introduction to network version features


- Perfect support for 1080P full HD decoding, compatible to drive 15-100 inch LCD screen.
- Support mainstream media formats, support split-screen playback functions such as pictures, videos, rolling subtitles, and office software.
- Support display of station logo, date, time, week, weather forecast, etc.
- Diverse and flexible interface layout, split screen and full screen freely.
- Any switch between horizontal and vertical screens, smooth transition without black screen.
- Support picture + background music playback mode, which can replace traditional light boxes and posters.
- Support multiple playback modes such as loop, timing, interstitial, pad, etc., to achieve flexible control of playback time, sequence, frequency, content, location, etc.
- Multi-screen interaction, realizing multiple display terminals to play the same content at the same time.
- Support resumable downloading and downloading regularly, and reasonably occupy network bandwidth.
- Super multi-period timing switch function, unattended.
- Support U disk import or direct playback.
- Automatic repair, remote upgrade, intelligent domain name resolution, convenient and quick operation and maintenance
- Support LAN/WiFi/3G/4G network access, which can realize multi-network hybrid networking.

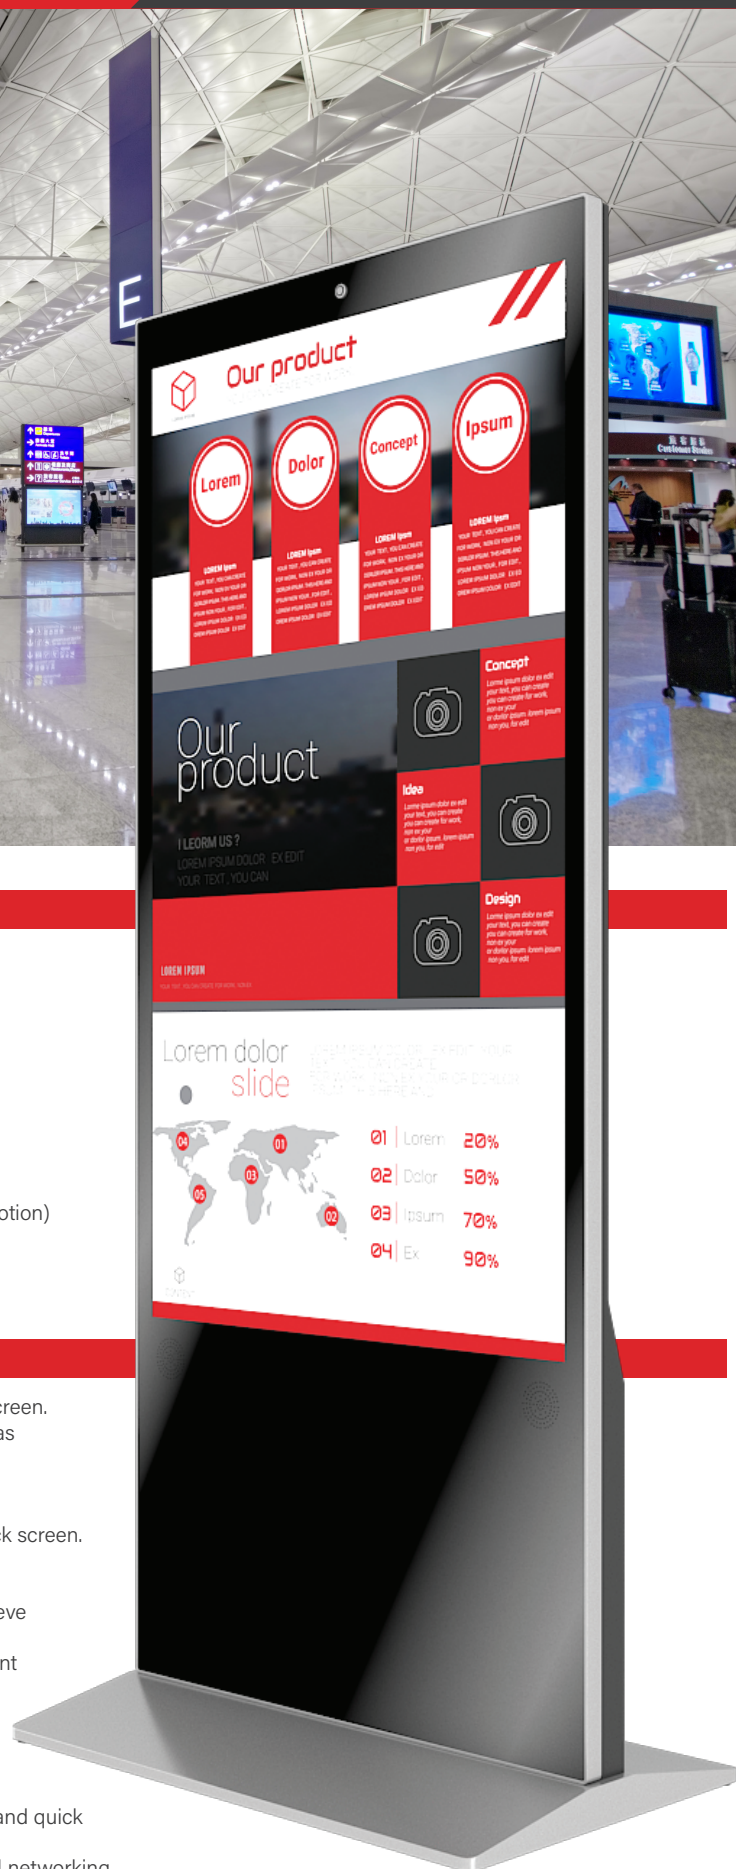



# S2 Series

Standing Advertising Player Machine

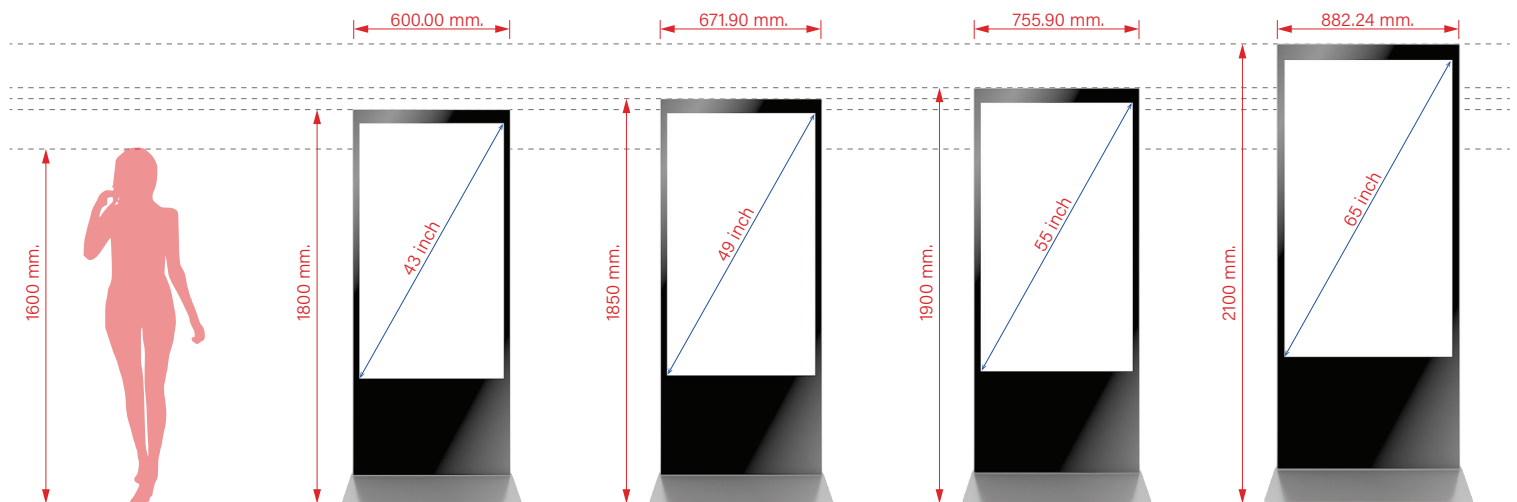

	FM-43S2T	FM-49S2T	FM-55S2T	FM-65S2T
Model :	43 inch	49 inch	55 inch	65 inch
Machine size :	1800 x 600 x 450 mm.	1850 x 672 x 450 mm.	1900 x 756 x 500 mm.	2100 x 882 x 500 mm.
Screen size :	941 x 530 mm.	1076 x 607 mm.	1209 x 680 mm.	1428 x 805 mm.
Carton size :	1900 x 200 x 720 mm.	1930 x 200 x 700 mm.	1980 x 200 x 880 mm.	2200 x 200 x 1050 mm.
Weight :	60 Kg.	65 Kg.	70 Kg.	80 Kg.
LED Parameter				
LED Brand :	43 inch (LG/BOE)	49 inch (LG/BOE)	55 inch (LG/BOE)	65 inch (LG/BOE)
Display ratio :	16 : 9	16 : 9	16 : 9	16 : 9
Resolution :	1920 x 1080 / 3840 x 2160	1920 x 1080 / 3840 x 2160	1920 x 1080 / 3840 x 2160	1920 x 1080 / 3840 x 2160
Pixel pitch :	0.1815 x 0.5415 mm	0.1815 x 0.5415 mm	0.1815 x 0.5415 mm	0.1815 x 0.5415 mm
Horizontal frequency :	30-80 KHz.	30-80 KHz.	30-80 KHz.	30-80 KHz.
Vertical frequency :	60 / 75 Hz.	60 / 75 Hz.	60 / 75 Hz.	60 / 75 Hz.
Color support :	16.77 million	16.77 million	16.77 million	16.77 million
LED Life :	50,000 Hrs.	50,000 Hrs.	50,000 Hrs.	50,000 Hrs.
Average brightness :	350 cd/m <sup>2</sup>	350 cd/m <sup>2</sup>	500 cd/m <sup>2</sup>	500 cd/m <sup>2</sup>
Contrass :	1200 : 1	1200 : 1	1200 : 1	1200 : 1
Viewing angle :	Up/Down/Left/Right 178°	Up/Down/Left/Right 178°	Up/Down/Left/Right 178°	Up/Down/Left/Right 178°
Input voltage :	110-220 VAC (50-60 Hz)	110-220 VAC (50-60 Hz)	110-220 VAC (50-60 Hz)	110-220 VAC (50-60 Hz)
Power management :	Compliant with VESA DPMS	Compliant with VESA DPMS	Compliant with VESA DPMS	Compliant with VESA DPMS
Power consumption :	< 110W	< 110W	< 110W	< 110W
Working temperature :	0 - 40 °C	0 - 40 °C	0 - 40 °C	0 - 40 °C
Storage temperature :	-10 - 50 °C	-10 - 50 °C	-10 - 50 °C	-10 - 50 °C
TV Parameters (optional)				
TV system :	NTSC M/N , PAL BG/DK/11/H , SECAM L/L			
Resolution :	Analog and digital support upto 1080P format			
Input interface :	TV , VGA , HDMI , YPBPR , USB , AV , S-VIDEO			
Output interface :	AV			
Voice control :	Automatic sound standard detection, support balance adjustment, surround			
Sound power :	2 x 10 W			
Input/output ports (optional)				
USB Interface :	2 x USB 2.0			
TF Card :	Standard 1 channel, multiple channels can be customize			
HDMI Interface :	1			
DC :	1			
MIC audio input :	1			
LINE audio output interface :	1			
LAN network interface :	1 x RJ45			
Power				
Voltage :	DC 12V / AC 100-240V 50-60 Hz (External)			
Standby power (Energy Star) :	1W			
Configuration option				
Standard configuration :	J1900 industrial control motherboard , CPU Celeron quad-core 1.8 GHz , Memory and harddisk optional			
Hi-end configuration :	H81 / B75 industrial control motherboard , CPU G2030/I3/I5/I7 , Memory and harddisk optional			
Power supply :	Megmeet integrated power supply			
Wireless keyboard and mouse :	Optional			
Strage humidity :	5% - 95%			



KEY



Wi-Fi Antenna




Power cable



Hex Wrench



Warranty Card



QC Sticker

**Digital Signage S2 Series**  
Standing Advertising Player Machine

**FMT Corporation Co.,Ltd.**

Leading Business Automatic Machine  
49/293 Soi Vibhavadi-Rangsit 64 Yeak 13,  
Talat Bangkhen, Lak Si,  
Bangkok 10210  
02-5217155-59  
086-6889050  
fmt\_sales@hotmail.com



# S2 Series

Standing Advertising Player Machine



Capacitive Touch Screen

Infrared Touch Screen



## Capacitive Touch Screen Parameter

Induction Technology :	Multi-point projected capacitive touch
Application solution :	Heria
Touch point :	10 point touch
Sensing objectt :	Finger , Capacitive touch pen
Transmittance :	Viewing area > 85%
Touch accuracy :	10 ± 1ms
Resolution :	4096 x 4096
Response time :	Single point or Multi-point < 4 ms
Cursor speed :	Up to 120 point/sec
Service life :	More than 60,000,000 clicks
Screen protection glass :	3mm or 4mm optical tempered glass
Touch screen power supply :	USB or Serial port DC power supply (4.5-5V)
Power consumption :	< 1W
Compatible system :	Windows 7 / 10 , Android , Linux
Position correction :	Modify firmware through HERIA APK tool
Anti-glare decay function :	Capacitive touch not degraded by light
Operating temperature :	-10 °C - 60 °C

## Infrared Touch Screen Parameter

Induction Technology :	Infrared sensor for tube, Tube > 300 pairs
Touch point :	Infrared 10-point touch screen without driver
Sensing objectt :	Any opaque objects
Touch accuracy :	< 1.5 mm (Central Area) , < 2.0 mm (Edge Area)
Resolution :	32,767 x 32,767
Response time :	Single point mode : First point (click) : 8 ms / Continuous (writing) : 3 ms Multi-Point modes : First point (click) : 8 ms / Continuous (writing) : 8 ms Mouse Mode : First point (click) : 8 ms / Continuous (writing) : 8 ms
Cursor speed :	Single point up to 300 points/sec , Multi-Point and Mouse up to 125 points/sec
Service life :	More than 60,000,000 clicks
Screen protection glass :	3mm optical tempered glass
Touch screen power supply :	DC power supply (4.5-5V)
Power consumption :	< 1W
Compatible system :	Windows 7 / 8 to achieve 2-point operation and writing, Support WIN 7 gesture reconition
Position correction :	Comply with HID equipment standard, No positioning is required, and a management program is provided for positioning correction. 4 or 5 Point positioning methods can be select.
Anti-glare decay function :	Capacitive touch not degraded by light