



FM-490

49 inch
Embedded Capacitive
Touch Screen Display

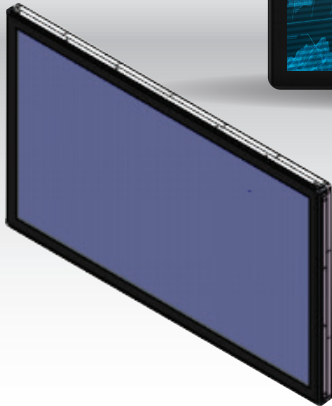

FMT-490

- 49 Inch touch screen
- Full HD display
- Industrial grade capacitive touch
- Dedicated to cabinet assembly

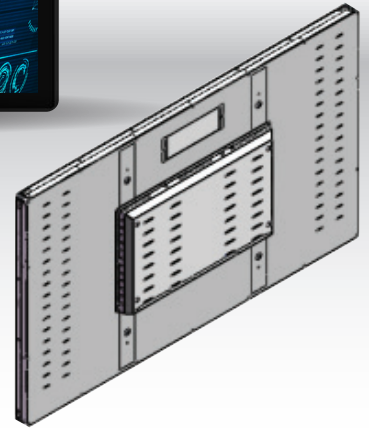

Feature & Specification



Moisture Proof



Water Proof



Dust Proof




Anti Crack

Main Feature

- Industrial grade capacitive touch screen
- Multi-Point capacitive touch
- Anti glare can use outdoor
- Dust and water proof
- Driver free ready to install
- Support multiple operating system
- Support USB and RS232
- Industrial ESD

Rich Installation Method

- Compact structure design
- Potrait and Landscape position
- VESA standard installation



Full HD Chimei / BOE LCD Module

- High brightness
- High Contrast
- Multi comor support
- FULL HD
- Fast response
- Wide viewing angle
- Multi signal input channels LVDS Interface

Scope of application

- Vending Machine
- Self-service terminal & Kiosk
- Interactive digital signage
- Gaming Machine
- Industrial automation application

For large size kiosk or digital signage

FMT Corporation Co.,Ltd.

Leading Business Automatic Machine
49/293 Soi Vibhavadi-Rangsit 64 Yeak 13,
Talat Bangkhen, Lak Si,
Bangkok 10210
02-5217155-59
086-6889050
fmt_sales@hotmail.com



FM-490

49 inch Embedded Capacitive Touch Screen Display



Size		49 Inch
Product Series		Embedded capacitive touch screen display
Shell Material		Electrolysis metal plate
Display Type		Active Matrix TFT-LCD , LED Backlight
LCD screen brand		LG / BOE
Resolution		1920 x 1080 / 3840 x 2160 pixels
Color Support		16.7 M
Brightness	LCD Panel	350 cd/m ² [LCD Brightness can be specified by order.]
	After Install Touch Panel	300 cd/m ²
View angle	Horizontal	89°
	Vertical	89°
LCD Display Ratio		16 : 9
Contrast		1,600 : 1
Response Time		14 ms. (G to G Type)
Power		Input 220VAC 50Hz. Onboard power supply
Video Input Format		HDMI , VGA
View angle	Operating Temp.	0 - 60 °C
	Storage Temp.	-20 - 60 °C
	Working Humidity	10% - 90%
	Storage Humidity	10% - 90%
Mean time between failures (MTBF)		30,000 Hrs.
LED Backlight Life		30,000 Hrs.
Power Consumption		80 Watt (Max)
Touch Screen Type		49 inch Multi-Point projected capacitive touch screen (2.5 mm. Touch Screen Tempered Glass)
Touch Screen Interface		USB 2.0 (RS232 port is an optional)
Support Operating System		Windows XP / 7 / 8 / 10 , Android , Mac-OS , Linux
Warranty		12 Months

Remarks : The relevant parameters of the LCD screen display are adjusted according to the selected LCD screen brand and model.

