



RoHS

EMC



FMT Corporation Co.,Ltd.

49/293 Soi Vibhavadi-Rangsit 64 Yaek 13, Talat Bangkhen, Lak Si, Bangkok 10210

Tel : 02-5217155-59 , Fax : 02-5217167 , Mobile : 089-6667578 , 086-6889050

Website : www.fmtcorp.co.th



NEW



- ◆ Tablet-like Touch Screen
- ◆ Capacitive multi-point touch panel
- ◆ Dust-proof and anti-corrosion design
- ◆ Embedded thermal printer



FMT-T8
Touch POS System--All In One



Product configuration

Main Board	POS Motherboard
CPU	Intel J1800, 2.41GHz Dual-core Processor
Memory	2G DDRIII (Max 8G*1 slot)
Hard Disk	32G / 64G / 120G SSD
Power	External Power Supply, Input:110V-240V 50/60Hz 2A, Output:12V DC 8A 96W MAX
Interface	4-6USB ports; 1 LAN port; 1 Serial port; 1 HDMI port; 1 Audio input (MIC); 1 Audio output
Monitor	15.6" Capacitive touch panel, 15.6" TFT LED Screen, Resolution: 1366*768
Customer display	11.6" TFT LED Resolution: 1920*1080 VFD customer display with 2 lines, 40 digits (Optional:LED 8N, 8 digits)
Optional Printer	Embedded thermal printer

Our factory in China was established in October 1998. We are high-tech company with R & D, production, management, sales and service together. We're mainly engaged in POS System, Cash Drawer, POS receipt/barcode printer, barcode scanner, magnetic card reader & writer and other related products.

1. Company Strength: Over 1750m² office site in Guangzhou including 1000m² warehouse and around 100m² showroom. Besides, we have factory with an area of more than 13300m² in Hunan Province with automatic Production line which can improve the production ability and save the production cost for you.
2. Our company staff -- There are about 100 staff in our company, including 10 engineers, and 12 professional QC. We have franchisers all over major cities in China. Foreign Trade Department--10 sales with professional international trade knowledge and good language ability & skills (3 with more than 8 years foreign trade experience).
3. Big Brand --- With 20 years history in the POS field, Our OEM factory brand in China has successfully registered in 102 countries globally.
4. Trade fair and exhibitions home and abroad : CES in Las Vegas USA, AUTOCOM in Brazil, GITEX in Dubai, EUROICIS & EUROSHOP in Germany, Computex in Taipei, Canton Fair in Guangzhou , In -store Asia in New Delhi and so on.
5. Certificates: 3C, CE, RoHS, FCC, EMC.

Company Profile



**100%
Aluminium**



- ◆ Tablet-like Touch Screen
- ◆ 100% Aluminum Housing
- ◆ Capacitive multi-point touch panel
- ◆ Dust-proof and anti-corrosion design

**HOT
SELLER**



FM-A1
Touch POS System--All In One

Product configuration

Main Board	POS Motherboard
CPU	Intel J1800, 2.41GHz Dual-core Processor
Memory	2G DDRIII (Max 8G*1 slot)
Hard Disk	32G / 64G / 120G SSD
Power	External Power Supply, Input:110V~240V 50/63Hz 2A, Output:12V DC 8A 96W MAX
Interface	1 PS/2 mouse; 1 PS/2 keyboard; 4~6USB ports; 1 LAN port; 1~2 Serial ports; 1 VGA port; 1 parallel port; 1 Audio input (MIC); 1 Audio output
Monitor	15" Touch LVDS LED resistive touch panel, compatible with ELO Touch screen Standard (Optional: Capacitive screen) Resolution: 1024*768



FM-A1
Touch POS System--Complete Set

Product configuration

Main Board	POS Motherboard
CPU	Intel J1800, 2.41GHz Dual-core Processor
Memory	2G DDRIII (Max 8G*1 slot)
Hard Disk	32G / 64G / 120G SSD
Power	External Power Supply, Input:110V~240V 50/63Hz 2A, Output:12V DC 8A 96W MAX
Interface	1 PS/2 mouse; 1 PS/2 keyboard; 4~6USB ports; 1 LAN port; 1~2 Serial ports; 1 VGA port; 1 parallel port; 1 Audio input (MIC); 1 Audio output
Monitor	15" Touch LVDS LED resistive touch panel, compatible with ELO Touch screen Standard (Optional: Capacitive screen) Resolution: 1024*768
Cash drawer	405 3 position lock, 5 bills 4 coins (Optional: 4B8C)
printer	58mm thermal printer (Optional: 76mm dot-matrix printer, or 80mm thermal with auto-cutter printer)
Scanner	Optional

NEW

Aluminium alloy



FM-A2

Touch POS System--All In One

Product configuration

Main Board	POS Motherboard
CPU	Intel J1800, 2.41GHz Dual-core Processor
Memory	2G DDRIII (Max 8G*1 slot)
Hard Disk	32G / 64G / 120G SSD
Power	External Power Supply, Input:110V~240V 50/63Hz 2A, Output:12V DC 8A 96W MAX
Interface	4~6USB ports; 1 LAN port; 1 Serial port; 1 HDMI port; 1 Audio input (MIC); 1 Audio output
Monitor	15" Capacitive touch panel, 15" TFT LED Screen, Resolution: 1024*768
Customer display	15" TFT LED Resolution: 1024*768 VFD customer display with 2 lines, 40 digits (Optional:LED 8N, 8 digits)
Optional Printer	80mm embedded thermal printer; speed: 230mm/s; thermal paper: 80*60mm



- ◆ Tablet-like Touch Screen
- ◆ Aluminum alloy Housing
- ◆ Capacitive multi-point touch panel
- ◆ Dust-proof and anti-corrosion design
- ◆ 80mm embedded thermal printer



16:9
Wide Screen

HOT
SELLER





FM-T6

Touch POS System--All In One

Product configuration

Main Board	POS Motherboard
CPU	Intel J1800 2.41GHz Dual-core Processor
Memory	DDRIII 2G or 4G
Hard Disk	32G / 64G / 120G SSD
Power	External Power Supply, Input:110V~240V 50/63Hz 2A, Output:12V DC 8A 96W MAX
Interface	6 USB ports; 1 LAN port; 1~2 Serial ports; 1 VGA port 1 Audio input (MIC); 1 Audio output
Monitor	15.6" Touch LVDS LED capacitive touch panel, Resolution: 1366*768
Customer display	VFD customer display with 2 lines, 40 digits (Optional:LED 8N, 8 digits)

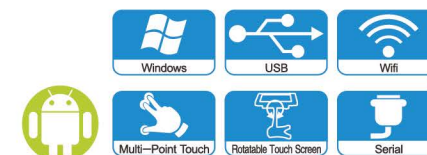



Colour




FM-T3

Touch POS System--All In One

Product configuration

Main Board	POS Motherboard
CPU	Intel J1900 2.0GHz Quad-core Processor
Memory	DDRIII 2G or 4G
Hard Disk	32G / 64G / 120G SSD
Power	External Power Supply, Input:110V~240V 50/63Hz 2A, Output:12V DC 8A 96W MAX
Interface	6 USB ports; 1 LAN port; 1-2 Serial ports; 1 VGA port; 1 Audio input (MIC); 1 Audio output
Monitor	15" Touch LVDS LED resistive touch panel, compatible with ELO Touch screen Standard (Optional: Capacitive screen) ; Resolution: 1024*768
Customer display	VFD customer display with 2 lines, 40 digits (Optional:LED 8N, 8 digits) 12.1" TFT LED / 15" TFT LED , Resolution: 1024*768 (Optional)
Optional Printer	80mm embedded thermal printer; speed: 230mm/s; thermal paper: 80*60mm

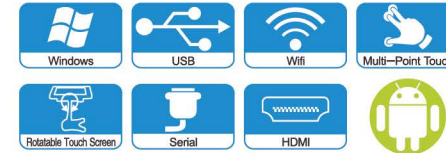

FM-T1

Ultra-thin
Touch POS System--All In One

Product configuration

Main Board	POS Motherboard
CPU	Intel J1900 2.0GHz Quad-core Processor
Memory	DDRIII 2G or 4G
Hard Disk	32G / 64G / 120G SSD
Power	External Power Supply, Input:110V~240V 50/63Hz 2A, Output:12V DC 8A 96W MAX
Interface	6 USB ports; 1 LAN port; 1-2 Serial ports; 1 VGA port 1 Audio input (MIC); 1 Audio output
Monitor	15" Touch LVDS LED resistive touch panel, compatible with ELO Touch screen Standard (Optional: Capacitive screen) , Resolution: 1024*768
Customer display	VFD customer display with 2 lines, 40 digits (Optional:LED 8N, 8 digits) 12.1" TFT LED / 15" TFT LED , Resolution: 1024*768 (Optional)





FM-3065 Touch POS System

Product configuration

Main Board	POS Motherboard
CPU	Intel J1800 2.41GHz Dual-core Processor
Memory	DDR3 2G or 4G
Hard Disk	32G / 64G / 120G SSD or 500G (1 x 2.5" HDD SATA)
Power	External Power Supply, Input:110V~240V 50/63Hz 2A, Output:12V DC 8A 96W MAX
Interface	1 PS/2 mouse; 1 PS/2 keyboard; 4 USB ports; 1 LAN port; 1-2 Serial ports; 1 VGA port; 1 parallel port; 1 Audio input (MIC); 1 Audio output
Monitor	15" Touch LVDS LED resistive touch panel, compatible with ELO Touch screen Standard; Resolution: 1024*768
Customer display	15" / 12" TFT LED Resolution: 1024*768 VFD customer display with 2 lines, 40 digits (Optional:LED 8N, 8 digits)



- ◆ 12.1" Customer Display
- ◆ Ultra-thin tablet-like touch screen
- ◆ With Built-in 58mm Thermal Printer

FM-G3 Touch POS Weighing Scale

Product configuration

Main Board	POS Motherboard
CPU	Intel J1900 2.0GHz Quad-core Processor
Memory	DDR3 2G or 4G
Hard Disk	32G / 64G / 120G SSD
Power	External Power Supply, Input:110V~240V 50/63Hz 2A, Output:12V DC 8A 96W MAX
Interface	6 USB ports; 1 LAN port; 1 HDMI; 1 VGA port 1 Audio input (MIC); 1 Audio output
Monitor	12.1" Touch LVDS LED capacitive touch panel, Resolution: 1280*800
Customer display	12.1" LED screen Resolution: 1280*800
Checkout scale	PBX series OS2X
Weighing capacity(Max)	15/30 kg
Division value(Min)	5/10 g
Weighing capacity(Min)	100 g
Tare (Max)	-14.995 kg

NEW



Aluminium alloy

- ◆ Built-in Thermal Receipt Printer 80mm
- ◆ Built-in White Light Bar code Scanner



FM-Q1

Wall-mounted Touch POS System --All In One

Product configuration

Main Board	POS Motherboard
CPU	Intel J1800, 2.41GHz Dual-core Processor
Memory	2G DDRIII (Max 8G*1 slot)
Hard Disk	32G / 64G / 120G SSD
Power	External Power Supply, Input:110V-240V 50/63Hz 2A, Output:12V DC 8A 96W MAX
Interface	2USB ports; 1 LAN port; 1 Serial port;
Monitor	21.5" Capacitive touch panel, 21.5" TFT LED Screen, Resolution: 1920*1080
Optional	support wechat, alipay and white light payment method

NEW



Aluminium alloy



FM-TD35

POS System-Complete Set

Product configuration

Main Board	POS Motherboard
CPU	Intel J1800 2.41GHz Dual-core Processor
Memory	DDRIII 2G or 4G
Hard Disk	32G / 64G / 120G SSD or 500G (1 x 2.5" HDD SATA)
Power	250W /220V/110V DC Power supply
Interface	1 PS/2 mouse; 1 PS/2 keyboard; 6 USB ports; 1 LAN port; 1 Serial port; 1 VGA port; 1 Parallel port; 1 Audio input (MIC); 1 Audio output
Monitor	12"LED screen
Printer	80/58 mm thermal printer
Customer display	12"LED screen
Pos keyboard	KB-105F keyboard
Cash drawer	405 3 position lock



FM-3072
Touch POS System



FM-3073
Touch POS System



Product configuration

OS	Win 7 / 8 / 10	Android 4.4 / 5.1
Power	12V DC (External/Internal)	
Processor	Intel J1800 2.41GHz Dual-core Processor	Magny-cours
Memory	DDRIII 2G or 4G	DDRIII 1G / 2G
Flash	32G / 64G / 120G SSD	4G / 8G
Display	12.1" Touch LVDS LED capacitive touch panel, Resolution: 1280*800	
Interface	2*Serial Port, 6*USB	
WIFI	Optional	
RJ45	10-1000M Ethernet	

Product configuration

OS	Android 4.4
Power	12V DC (External/Internal)
Processor	Magny-cours
DDR	DDRIII 1G
Flash	8G
Display	12.1" Touch LVDS LED capacitive touch panel, Resolution: 1280*800
Interface	1*Serial Port, 3*USB
WIFI	Optional
RJ45	10-1000M Ethernet



With magcard reader



FM-3025 Touch POS System

Product configuration

Main Board	POS Motherboard
CPU	Intel J1800 2.41GHz Dual-core Processor
Memory	DDRIII 2G
Hard Disk	32G / 64G / 120G SSD or 500G (1 x 2.5" HDD SATA)
Power	250W / 220V/110V ATX Power supply
Interface	1 PS/2 mouse; 1 PS/2 keyboard; 4 USB ports; 1 LAN port; 1-5 Serial ports; 1 VGA port; 1 parallel port; 1 Audio input (MIC); 1 Audio output
Monitor	15" Touch LVDS LED resistive touch panel, compatible with ELO Touch screen Standard; Resolution: 1024*768
Customer display	VFD customer display with 2 lines, 40 digits (Optional: LED 8N, 8 digits)
Optional MSR	Track 1+2+3



Watermark Money Checker



LED Light Money Checker

FM-686E ECR



FM-4042H POS System--Complete Set

Product configuration


Main Board	POS Motherboard
CPU	Intel J1800 2.41GHz Dual-core Processor
Memory	DDRIII 2G or 4G
Hard Disk	32G / 64G / 120G SSD or 500G (1 x 2.5" HDD SATA)
Power	250W / 220V/110V ATX Power supply
Interface	1 PS/2 mouse; 1 PS/2 keyboard; 6 USB ports; 1 LAN port; 1 Serial port; 1 VGA port; 1 Parallel port; 1 Audio input (MIC); 1 Audio output
Monitor	12.1"LED Resolution: 1280*800
Printer	58mm thermal printer (Optional: 76mm dot-matrix printer, or 80mm thermal with auto-cutter printer)
Customer display	VFD customer display with 2 lines, 40 digits (Optional:LED 8N, 8 digits)
Pos keyboard	KB-105F keyboard
Cash drawer	405 cash drawer 5 bills 4 coins (Optional: 4B8C)



FM-376 POS System--Complete Set

Product configuration

Main Board	POS Motherboard
CPU	Intel J1800 2.41GHz Dual-core Processor
Memory	DDRIII 2G
Hard Disk	32G / 64G / 120G SSD or 500G (1 x 2.5" HDD SATA)
Power	250W / 220V/110V ATX Power supply
Interface	1 PS/2 mouse; 1 PS/2 keyboard; 6 USB ports; 1 LAN port; 1 Serial port; 1 VGA port; 1 Parallel port; 1 Audio input (MIC); 1 Audio output
Monitor	12.1"LED Resolution: 1280*800
Printer	58mm thermal printer
Customer display	VFD customer display with 2 lines, 40 digits (Optional:LED 8N, 8 digits)
Pos keyboard	KB-103 keyboard
Cash drawer	405 cash drawer 5 bills 4 coins (Optional: 4B8C)

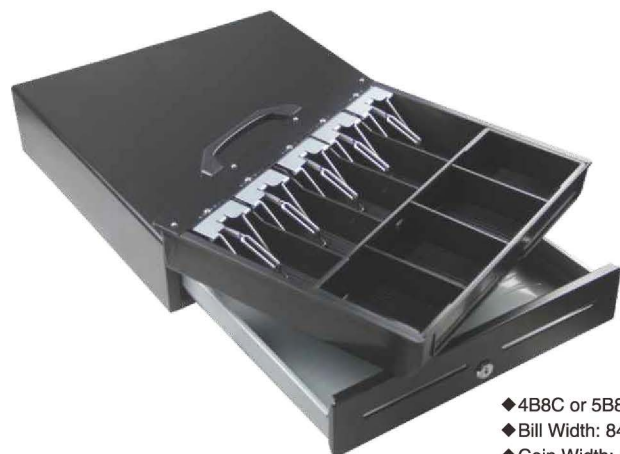

FM-405D

- ◆ 4B8C or 5B8C adjustable Cash Drawer (RJ11/RJ12/USB)
- ◆ Bill Width: 84/87/85/85mm, Bill Length: 183mm
- ◆ Coin Width: 80*84*84*81mm, Coin Length: 57mm
- ◆ 2 Check Slots, 3 Position Lock, 12V / 24V
- ◆ Removable coin tray
- ◆ Optional bill and coin compartment
- ◆ Size: 405(W)*420(L)*100(H)mm
- ◆ Gross weight: 8.5 kgs
- ◆ Emergency switch
- ◆ Optional: Micro switch, Bell



FM-405A

- ◆ 4B8C or 5B8C adjustable Cash Drawer (RJ11/RJ12/USB)
- ◆ Bill Width: 84/87/85/85mm, Bill Length: 183mm
- ◆ Coin Width: 80*84*84*81mm, Coin Length: 57mm
- ◆ 2 Check Slots, 3 Position Lock, 12V / 24V
- ◆ Removable coin tray
- ◆ Optional bill and coin compartment
- ◆ Size: 405(W)*420(L)*100(H)mm
- ◆ Volume weight: 8 kgs
- ◆ Emergency switch
- ◆ Optional: Micro switch



FM-405E

- ◆ 4B6C or 5B4C adjustable Cash Drawer (RJ11/RJ12/USB)
- ◆ Bill Width: 84/87/85/85mm, Bill Length: 183mm
- ◆ Coin Width: 80*84*84*81mm, Coin Length: 57mm
- ◆ 2 Check Slots, 3 Position Lock, 12V / 24V
- ◆ Removable coin tray
- ◆ Optional bill and coin compartment
- ◆ Size: 405(W)*420(L)*100(H)mm
- ◆ Gross weight: 9.0 kgs
- ◆ Emergency switch
- ◆ Optional: Micro switch, Bell



FM-405H

- ◆ **Manual Cash Drawer**
- ◆ 4B8C or 5B8C adjustable Cash Drawer
- ◆ Bill Width: 84/87/85/85mm, Bill Length: 183mm
- ◆ Coin Width: 80*84*84*81mm, Coin Length: 57mm
- ◆ 2 Check Slots
- ◆ Removable coin tray
- ◆ Optional bill and coin compartment
- ◆ Size: 405(W)*420(L)*100(H)mm
- ◆ Volume weight: 8 kgs
- ◆ Emergency opener





FM-410B

- ◆ 5B6C/7B4C Cash Drawer(RJ11/RJ12/USB)
- ◆ Bill Width: 83/71/71/71/70mm, Bill Length: 158mm
- ◆ Coin Size: 2/89(W)*66(L)mm, 2/142(W)*66(L)mm, 2/66(W)*134(L)mm
- ◆ 2 Check Slots, 3 Position Lock, 12V / 24V
- ◆ Size: 410(W)*420(L)*100(H)mm
- ◆ Emergency switch
- ◆ Optional: Micro switch



FM-330A

- ◆ 4B4C Cash drawer(RJ11/RJ12)
- ◆ 330(W)*360(L)*90(H)MM
- ◆ Bill width:71/73/73/65mm, bill length:174mm
- ◆ Coin box :71/73/73/67mm, coin length:79mm
- ◆ Net weight:3.5 kgs, Gross weight:4.0 kgs
- ◆ 12V / 24V
- ◆ Emergency switch



FM-460

**Slider type: Ball bearing
slide for
smooth & stable operation**

Heavy-Duty Cash Drawer
Metal Cash Tray

- ◆ 5B5C Cash drawer(RJ11/RJ12/USB)
- ◆ Size:460(W)*460(L)*115(H)mm
- ◆ Bill width:74/86/70/86/76mm, bill length:185mm
- ◆ Coin box :69/85/69/85/74mm, coin length:112mm
- ◆ 12V / 24V
- ◆ Emergency switch
- ◆ Optional: Micro switch, Bell



FM-4046

Heavy-Duty Cash Drawer
Metal Cash Tray

- ◆ 5B5C Cash Drawer (RJ11)
- ◆ 405(W)*460(D)*90(H)MM
- ◆ Bill width/mm: 76/82/75/65/60, bill length:193mm
- ◆ coin width: coin case 75/69/75/64/70(adjustable)
- ◆ coin length: 100, depth: 48
- ◆ 12V / 24V



FM-405B

- ◆ 5B4C Cash Drawer (RJ11)
- ◆ Bill Width: 78/78/72/72/72mm, Bill Length: 188mm, Bill Depth: 53mm;
- ◆ Coin Size: 150*90*42mm(W*L*D); 80*90*42mm(W*L*D); Width: 73/73mm; Length: 100mm; Depth: 50mm
- ◆ 1 check slot. 3 position lock.
- ◆ size: 405(W)*420(D)*100(H)



FM-170

- ◆ Interface: RJ11
- ◆ Lock: 2 position lock, Manual Open
- ◆ Bill: The 6 bill depth-83mm, 5 bill (adjustable) length-180mm, Width-23/17/17/17/29.5, 1 bill (steady) length-157mm, width-26mm
- ◆ Coin: 8 coin depth-60, middle 2 coin length-72mm, width-55mm. Left 4 coin length-71mm, width-59mm
- ◆ Check port: 1 Check slot
- ◆ Voltage: 12V 24V(option)
- ◆ Size: 460(W)*170(D)*100(H)



FM-58ZL01

- ◆ 58mm(2 Inches) paper width thermal Receipt printer
- ◆ Printing Speed: 90mm/s
- ◆ Reliability: 100km
- ◆ Interface: USB/Parallel/Serial/LAN ports
- ◆ Power Supply: DC 12V/2.6A



FM-410A

- ◆ 5B8C Cash Drawer (RJ11)
- ◆ 410(W)*415(L)*100(H)mm,
- ◆ Bill Width: 70/68/68/70/69mm, bill length: 178mm, bill Depth: 69mm;
- ◆ Coin Width: 76/88/88/83mm(adjustable); 83/83/83/83mm, Length: 58mm; Depth: 45mm
- ◆ coin length: 100, depth: 48
- ◆ removable coin tray
- ◆ Lock: 3 Position key



Paper loading method



Automatic paper loading



Electric paper loading



Manual paper loading

POS RECEIPT PRINTERS



FM-5802

- ◆ 58mm(2 Inches) paper width thermal printer
- ◆ Printing Speed: 90mm/s
- ◆ Reliability: 100km
- ◆ Interface: Parallel/USB ports
- ◆ Power Supply: DC 12V/2.6A



FM-8251

80mm thermal printer



FM-5803

- ◆ 58mm(2 Inches) paper width thermal printer
- ◆ Printing Speed: 90mm/s
- ◆ Reliability: 100km
- ◆ Interface: Parallel/Serial/LAN ports
- ◆ Power Supply: DC 12V/2.6A

- ◆ 80mm paper (3 Inches) width, with auto cutter
- ◆ Printing Speed: 260mm/s (max 300mm/s)
- ◆ Reliability: 100km
- ◆ Interface: USB + Serial
- ◆ Cash box control: DC 12~24V/1A
- ◆ Power Supply: DC 24V/2.5A



POS RECEIPT PRINTERS



FM-8030A
80mm thermal printer



- ◆ 80mm paper (3 Inches) width, with auto cutter
- ◆ Printing Speed: 230mm/s(max 300mm/s)
- ◆ Reliability: 100km
- ◆ Interface: USB (Optional Serial+USB+LAN ports)
- ◆ Cash box control: DC 12-24V/1A
- ◆ Power Supply: DC 24V/2.5A

FM-8250 80mm thermal printer



- ◆ 80mm paper width, with auto cutter
- ◆ Printing Speed: 260mm/s
- ◆ Reliability: 100km
- ◆ Interface: USB / LAN / USB+LAN Ports
- ◆ Cash box control: DC 12-24V/1A
- ◆ Power Supply: DC 24V/2.0A

FM-8256 80mm thermal printer



- ◆ 80mm(3 Inches) paper width, with auto cutter
- ◆ Printing Speed: 300mm/s
- ◆ Reliability: 100km
- ◆ Interface: Serial+USB+LAN ports
- ◆ Power Supply: DC 24V/2.5A

POS RECEIPT PRINTERS



- ◆ 58mm (2 inches) Bluetooth Thermal Receipt Printer
- ◆ Printing Speed: 60mm/s
- ◆ Reliability: 50km/100 million pulses
- ◆ Interfaces: USB/Bluetooth
- ◆ Power Supply: DC 7.4V/1.5A
- ◆ Supprt Windows(7,8,10)/ Android/IOS

FM-5860 Bluetooth Printer



Ribbon



Tripartite

- ◆ 76mm dot-matrix printer
- ◆ Printing Speed: 4.5 lines/s
- ◆ Reliability: 10 million lines
- ◆ Interface: USB
- ◆ Cash box control: DC 12-24 V / 1A
- ◆ Power Supply: DC 24V/2.5A

FM-2000

76mm dot-matrix printer



- ◆ 80mm (3 inches) Bluetooth Thermal Receipt Printer
- ◆ Printing Speed: 60mm/s
- ◆ Resolution: 203dpi (8dot/mm)
- ◆ Reliability: 50km/100 million pulses
- ◆ Interfaces: USB/Bluetooth
- ◆ Power Supply: External DC 9V/1.5A
- ◆ Bluetooth 4.0 (Iphone; Ipad)
- ◆ Supprt Windows(7,8,10)/ Android/IOS



FM-8060 Bluetooth Printer




- ◆ Barcode Label Printer
- ◆ Printing Speed: 107mm/s
- ◆ Print width: 104mm
- ◆ Reliability: TPH: 1 million inches
- ◆ Interface: RS-232C (max. 115,200 bps)/ USB
- ◆ RS-232C (max. 115,200 bps)/Centronics (factory option)
- ◆ Power Supply: Input: AC 100-240V
- ◆ Output: DC 24V 2.5A

FM-244

Barcode Label Printer

Electronic scale ▶ ▶ ▶

Barcode Scanner ▶ ▶ ▶ Barcode Scanner

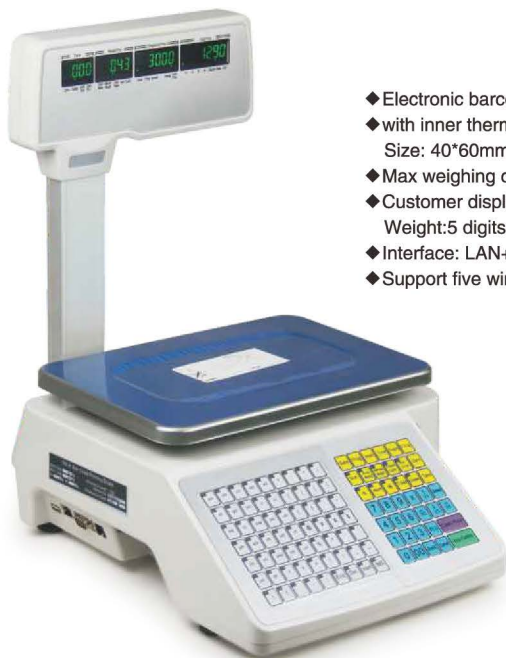

FM-TM30A

- ◆ Electronic barcode printing scale;
- ◆ with inner thermal barcode printer, 76mm/sec, Label Sticker Size: 40*60mm or 58*30mm ;
- ◆ Max weighing capacity is 6/15/30KGS;
- ◆ Customer display: Green LCD Display (Negative), Tare: 4 digits, Weight: 5 digits, Unit Price: 6 digits, Total: 7 digits;
- ◆ Interface: LAN+RJ11+USB+Serial ports.
- ◆ Support five windows



FM-TM Aa6a

- ◆ Electronic barcode printing scale;
- ◆ with inner thermal barcode printer, Print Speed: 76mm/s, Label Width: 30-60mm;
- ◆ Max weighing capacity is 30KGS;
- ◆ Interface: LAN or RS232;
- ◆ Customer Display Resolution: Ability: 15-30kgs ; (Weight 5 digits, unit price 5 digits, total price 6 digits)
- ◆ Large storage: max. 4000 PLU;
- ◆ CE certificate.



FM-1695

- ◆ 1D Laser Barcode Scanner
- ◆ scan distance: 10-820mm
- ◆ scanning speed: 100 times/s
- ◆ Interface: ps2/Serial/USB port
- ◆ shockproof & fallproof,
- ◆ Can be with holder

**Laser barcode scanner
1.5m Shockproof**



FM-25U

- ◆ 2D Barcode Scanner (can be with holder)
- ◆ Scanning Speed: 100 times/sec
- ◆ Support 1D and 2D barcode reading;
- ◆ Interfaces: USB port
- ◆ Current: 135mA
- ◆ Automatic Scanning

Laser barcode scanner



FM-T5 CCD

- ◆ LED self-induction barcode scanner
- ◆ scan distance: 10-20mm
- ◆ scanning speed: 300 times/s
- ◆ Error rate: 1/5 million
- ◆ RS232, USB interface
- ◆ Can read ID barcode on cellphone
- ◆ Wireless optional

barcode scanner



FM-1696W

- ◆ Wireless Laser Barcode Scanner
- ◆ Scan Speed: 120 ± 10 scans/second
- ◆ 100-300 meters distance
- ◆ Memory: 4MBytes, can save over 266000 scans
- ◆ Battery: 3.7V/1000mAh, polymer li-ion, can be taken it out easily, continue working for more than 20 hours
- ◆ Interface: USB/Serial

Wireless scanner

Barcode Scanner ▶ ▶ ▶

Monitor ▶ ▶ ▶



- ◆ Metrologic Laser Barcode Scanner
- ◆ Interface: USB/ps2
- ◆ Scanning Speed: 1200times/sec

FM-7120



- ◆ Omni-directional Laser Barcode Scanner
- ◆ 20-line network scanning pattern of flash ROM software upgrade
- ◆ Interface: USB/Serial
- ◆ Scanning Speed: 1500 scan lines per second

FM-9120



12.1" LED

- ◆ 12.1" LED Screen — Resolution: 1280*800
- ◆ Screen Size 16:10
- ◆ Interface: Built-in VGA and Power Plug

FM-LED-12



FM-2000

Laser barcode scanner desktop – stationary

- ◆ Scan Speed: 1500 lines
- ◆ Input voltage: DC 5V+10%
- ◆ Current: 260mA
- ◆ Interface supported: HID USB; Keyboard wedge; RS-232
- ◆ Light Source: 650nm visual Laser
- ◆ Scan angle: 5 scanning directions
- ◆ Scanning Line: 20 Lines



FM-1531 15.6" LED

- ◆ 15.6" Capacitive touch monitor with stand, USB interface with adapter and plug
- ◆ Support HDMI Interface
- ◆ Resolution: 1366*768
- ◆ Screen Ratio: 16:10
- ◆ Input Power: 12V, 3.0A
- ◆ Input Interfaces: VGA, DC

Monitor ▶▶▶

Customers display ▶▶▶
magnetic card read-write device



- ◆ 15" touch monitor (5 wire-resistive touch) with stand, USB interface with adapter and plug
- ◆ 1024*768 resolution
- ◆ Screen Ratio:4:3
- ◆ Input Power:12V,3.0A
- ◆ Input Interfaces:VGA, DC

FM-1530II



- ◆ 8 digits customer display,with pole and stand
- ◆ Interface:Serial +USB; Power supply: USB Port; Communication interface: Serial Port.
- ◆ With pole and stand

FM-LED8N



- ◆ 40 (2 lines * 20 columns) Vacuum fluorescent display
- ◆ Interface: USB+PS/2 or USB
- ◆ 12 VDC / Approx. 6W
- ◆ 226 (W) x 45 (D) x 85 (H) mm
- ◆ Power Supply: USB & Serial port or USB only
- ◆ With pole and stand

FM-210CE VFD



- ◆ 17" touch monitor (5 wire-touch resistive) with stand, USB interface with adapter and plug
- ◆ Resolution:1280*1024
- ◆ Screen Ratio:4:3
- ◆ Input Power:12V,3.0A
- ◆ Input Interfaces:VGA, DC

FM-LED-T17

17" TOUCH TFT monitor



Magcard reader&writer



Magcard reader

◆ size:

108(L)X33(W)X36.5(H)mm

Magcard mini-reader

- ◆ Mini Size Magnetic Card Reader, Track 1+2+3,
- ◆ Head life:Over 3 Million times
- ◆ Card Swiping Mode:Manual ,can support bi-directional card swiping
- ◆ Standard:ISO 7811, AAMVA and CA DMV Standard
- ◆ Dimension:90*30*26cm(L*W*H)
- ◆ Interface:USB,Serial or PS/2 ports,



FM-KB78
Programmable keyboard

- ◆ Programmable keyboard for major shopping malls POS system, according to user requirements can be assembled of different keys
- ◆ Available in a range of caps: bond one time, bond two times, bond four times, number keys
- ◆ Provide detailed programming procedure, users can easily define each key
- ◆ A 8 times lock with the electronic mandate concerts to the use of different levels, setting different functional requirements
- ◆ Can be installed magnetic card reader



FM-KB105F
POS keyboard

- ◆ Using ordinary computer standard keyboard arrangement
- ◆ Using the high strength membrane keys with over 10 million times working life
- ◆ Using laser engraving technology on the Key caps to make characters clear and wearproof
- ◆ Good quality and performance POS Keyboard
- ◆ Fashion and elegant appearance



FM-KB81
POS keyboard

- ◆ 81 keys Programmable keyboard with magcard reader track 2+3,
- ◆ Interface: ps/2 or USB
- ◆ Dimension: 390*155*42 mm
- ◆ Key Lifetime: Over 1 Million times
- ◆ Reding Speed: 10~120cm/s
- ◆ Head life: >500000 times
- ◆ Power Supply: DC+3.3V



58/80mm Thermal Paper



POS software